

STARTING BULL – PROVEN A MILLION TIMES OVER.

AFFORDABLE QUALITY.

Robust, fully proven and thoroughly optimised the Starting Bull is a powerful entry into the Banner brand world. This absolutely maintenance-free battery scores with top features and performance. In addition to calcium / calcium technology, the Starting Bull series offers twelve types with reliable four-chamber leak protection and enhanced safety due to central degassing and integrated backfire frits. First class attractive design with new terminal covers represents a clear indication of the potential of this battery.



STARTING BULL **THE ENTRY TO THE Banner BRAND WORLD.**

The Banner Starting Bull is the entry level product to the Banner brand. However, safety knows no compromises and therefore this product, which has been proven millions of times meets the very latest battery design standards.


TECHNICAL DATA AND INFORMATION



- ▶ Four-chamber leak protection with integrated backfire safeguard for 12 best sellers from 44-95 Ah
- ▶ Absolutely maintenance-free due to the use of calcium / calcium technology
- ▶ Reliable cold starting behaviour
- ▶ Niche and supplementary types ensure complete coverage of the current vehicle fleet in Europe
- ▶ Simple classification due to the use of DIN and UK numbers for type designations
- ▶ Quality and know-how from Austria
- ▶ Optimum price-performance ratio



4-CHAMBER LEAK PROTECTION, **THE INNOVATIVE SAFETY GUARANTEE.**



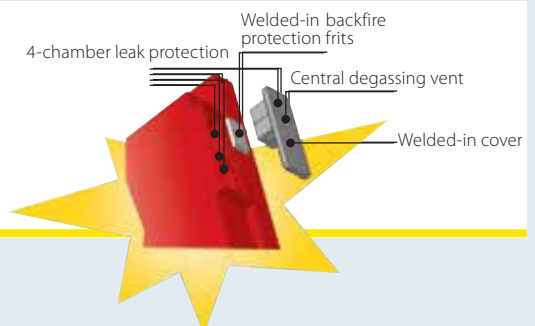









Tried and tested, four-chamber leak protection is used in 12 Starting Bull Europa types. In this system, four chambers provide a safeguard against escapes of battery acid during extreme vibrations. Moreover, central degassing and welded-in backfire frits secure optimum operational safety. All these features add up to a significant increase in safety during vehicle use and handling.





Typ	Info	Box	Ah 20 h	A EN		
-----	------	-----	------------	---------	---	---

STARTING BULL

CAR BATTERY IN OEM QUALITY

6 Volt						
066 12			66	360	0	1
077 18			77	450	0	1
12 Volt						
530 30			30	300	0	4
530 34			30	300	1	4
544 09 		T4 / LB1	44	360	0	1
545 59 		H4 / L1	45	400	0	1
545 77		E2	45	300	0	1
545 79		E2	45	300	1	1
555 19 		T5 / LB2	55	450	0	1
560 08 		T5 / LB2	60	480	1	1
560 09 		T5 / LB2	60	480	0	1
560 10		BCI 75	60	675	1	5
562 19 		H5 / L2	62	510	0	1
570 44 		T6 / LB3	70	640	0	1
572 12 		H6 / L3	72	650	0	1
572 33 		H6 / L3	72	650	1	1
580 14 		T7 / LB4	80	660	0	1
588 20 		T8 / LB5	88	680	0	1
588 34 RF		H8 / L5	88	680	0	1
595 33 		H8 / L5	95	740	0	1

 Double Top,  = 4-chamber leak protection, RF = vibration-resistant, GA = battery with central degassing, HGI = hard rubber set, mG = with handle, RZS = flame arrester, * limited use, ** with base hold-down adapter